

MMA - Inverter

**Arc 200i**

- Input Voltage : 230V
- Current Range : 20-200A
- Weight : 08kgs

**Arc 250i**

- Input Voltage : 230V
- Current Range : 30-250A
- Weight : 10.7kgs

**Rogue ES 200i Pro**

- Input Voltage : 230V/ 115V
- Current Range : 20-200A
- Weight : 8.2kgs

**Caddy Arc 251i A34**

- Input Voltage : 400V $\pm$ 15%
- Current Range : 04-250A
- Weight : 10.5kgs

MMA - Inverter

**Arc 300i**

- Input Voltage : 400V $\pm$ 15%
- Current Range : 30-300A
- Duty Cycle, 30% : 300A
- Weight : 15kgs

**Arc 400i**

- Input Voltage : 400V $\pm$ 15%
- Current Range : 60-400A
- Duty Cycle, 60% : 400A
- Weight : 24.5kgs

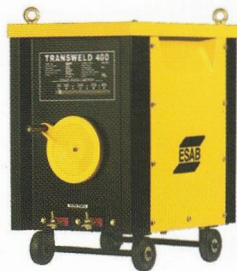
**Buddy Arc 400i/ 400i XC**

- Input Voltage : 400V $\pm$ 15%
- Current Range : 20-400A
- Duty Cycle, 60% : 400A
- Weight : 29/ 31kgs

**Arc 630i**

- Input Voltage : 400V $\pm$ 20% -15%
- Current Range : 20-630A
- Duty Cycle, 60% : 630A
- Weight : 59kgs

MMA - Conventional

**Transweld 400**

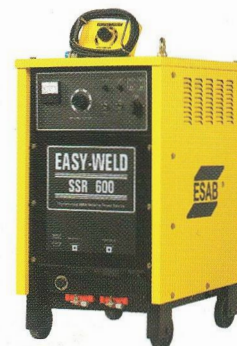
- Technology : Transformer
- Input Voltage : 415V $\pm$ 10%, 2 line
- Current Range : 50-400A
- Weight : 115kgs

**RS 400x**

- Technology : Thyristor Rectifier
- Input Voltage : 415V $\pm$ 10%
- Current Range : 50-400A
- Weight : 130kgs

**RS 400**

- Technology : Thyristor Rectifier
- Input Voltage : 415V $\pm$ 10%
- Current Range : 10-400A
- Weight : 195kgs

**EasyWeld SSR 600**

- Technology : Thyristor Rectifier
- Input Voltage : 415V $\pm$ 10%
- Current Range : 10-600A
- Weight : 160kgs

MIG - Inverter



MIG 301i

- Current Range : 60-300A
- Duty Cycle, 60% : 300A
- Wire Feed Speed : 1.5-20m/min
- I/C Length : 5m



MIG 400i CCCV

- Current Range : 40-400A
- Duty Cycle, 60% : 400A
- Wire Feed Speed : 1.0-25m/min
- I/C Length : 5m



Buddy MIG 400i | 500i

- Current Range : 50-400A | 50-500A
- Duty Cycle, 60% : 400A | 500A
- Wire Feed Speed : 1.5-20m/min
- I/C Length : 5/10/15/25m



Fabricator Pro EM500i

- Current Range : 30-500A
- Duty Cycle, 60% : 500A
- Wire Feed Speed : 2.0-20m/min
- I/C Length : 5/10m

MIG - Compact & Conventional



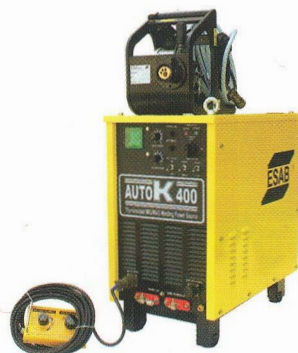
**MIG C250i
(Inverter)**

- Current Range : 30- 250A (1ph/ 3ph)
- Duty Cycle, 60% : 250A
- Wire Feed Speed : 1.0-16m/min
- Inbuilt Wire Feeder unit



**MIGMATIC 250
(Diode Rectifier)**

- Current Range : 40-250A
- Duty Cycle, 60% : 250A
- Wire Feed Speed : 1.5-22m/min
- I/C Length : 5m



**Auto K 400
(Thyristor Rectifier)**

- Current Range : 60-400A
- Duty Cycle, 60% : 400A
- Wire Feed Speed : 1.0-16m/min
- I/C Length : 5/10/15m



**Auto K 600
(Thyristor Rectifier)**

- Current Range : 60-600A
- Duty Cycle, 60% : 600A
- Wire Feed Speed : 1.0-16m/min
- I/C Length : 5/10/15m

Synergic Pulse MIG



Aristo Mig U5000iw

- Current Range : 16-500A
- Duty Cycle, 60% : 500A
- Wire Feed Speed : 0.8-25m/min
- I/C Length : 5/10/15/25/35m



Aristo 500ix

- Current Range : 16-500A
- Duty Cycle, 60% : 500A
- Wire Feed Speed : 0.8-25m/min
- I/C Length : 2/5/10/15/25/35m



Feed 3004w/4804w

- Wire Diameter
- 0.6 - 1.6mm (Feed 3004w)
- 0.6 - 2.4mm (Feed 4804w)

- Wire Feed Speed
- 0.8 - 25m/min

- Power Source Compatibility
- Aristo 4004i
- Aristo 5000iw / U5000iw
- Aristo 500ix



Robust Feed U6

- Wire Diameter
- 0.6 - 2.0 mm

- Wire Feed Speed
- 0.8 - 25.0 m/min

- Control Panel
- Embedded
- Power Source Compatibility
- Aristo 500ix

TIG - Inverter

**Rogue ET 200iP**

- Input Voltage : 230V± 15%
- Current Range : 10-200A
- Duty Cycle, 25% : 200A
- Weight : 8.7kgs

**TIG 300i**

- Input Voltage : 415V± 15%
- Current Range : 10-300 A
- Duty Cycle, 100% : 300A
- Weight : 35Kg

**Buddy TIG 400i**

- Input Voltage : 400V±15%
- Current Range : 05-400A
- Duty Cycle, 60% : 310A
- Weight : 32.5kgs

**TIG 401iw**

- Input Voltage : 415V±15%
- Current Range : 20-400A
- Duty Cycle, 60% : 400A
- Weight : 65kgs
- In built cooling unit



Pulse TIG

TIG 310i

- Input Voltage : 415V±15%
- Current Range : 10-315A
- Duty Cycle, 100% : 200A
- In built cooling unit



Pulse TIG

Renegade ET300iP

- Input Voltage : 230±10%, 1Ph
- Current Range : 230-480±10%, 3Ph
- Duty Cycle, 100% : 200A
- Watercooler : EC 1000



Pulse TIG

**Caddy TIG 2200i TA34 /
Caddy TIG 2200i AC/DC TA34**

- Input Voltage : 230±10%, 1Ph
- Current Range : 3-220A
- Duty Cycle, 100% : 110A | 140A
- Watercooler : CoolMini



Pulse TIG

Origo TIG 3000i AC/DC TA24

- Input Voltage : 400±10%, 3Ph
- Current Range : 4-300A
- Duty Cycle, 100% : 200A
- Watercooler : CoolMidi 1800



Pulse TIG

Aristo Tig 4000iw TA6

- Input Voltage : 400±10%, 3Ph
- Current Range : 4-400A
- Duty Cycle, 100% : 250A
- Watercooler : Inbuilt



Pulse TIG

Origo Tig 4300iw AC/DC TA24

- Input Voltage : 400±10%, 3Ph
- Current Range : 4-430A
- Duty Cycle, 100% : 315A
- Watercooler : Inbuilt

MIG - Air Cooled Torches

**PSF 260**

- Duty Cycle(Mixed Gas), 60% : 225A
- Duty Cycle (CO₂), 60%, : 250A
- Wire Diameter, mm : 0.6-1.0
- Length : 3/5m

**PSF 415**

- Duty Cycle(Mixed Gas), 60% : 325A
- Duty Cycle (CO₂), 60%, : 380A
- Wire Diameter, mm : 0.8-1.6
- Length : 3/5m

**PSF 515**

- Duty Cycle(Mixed Gas), 60% : 400A
- Duty Cycle (CO₂), 60% : 450A
- Wire Diameter, mm : 1.0-1.6
- Length : 3/5m